

ESD3000 - MODULAR HANDHELD TESTER

# Electrostatic Discharge Testing





This document has been  
optimized for electronic media



Smart navigation through technical  
specifications. Click the green links.



#### Accredited Calibration

Quality at EMC PARTNER is based on an ISO 9001 management system. This is the foundation for an ISO 17025 accreditation verified by the Swiss Calibration Service (SCS). SCS No. 146 is the accreditation number of EMC PARTNER AG. Locally accredited but recognized worldwide through affiliation with the ILAC organisation



## THE ESD TESTING SOLUTION

# POWER AT YOUR FINGER TIPS


Electrostatic Discharge (ESD) is the most common test procedure applied to any electronic or electrical equipment. Used extensively to test:

- › Commercial products
- › Industrial systems
- › Military electronics
- › Automotive electronics
- › Fuses and detonators
- › Railway electronics
- › Avionic equipment qualification
- › Telecom equipment
- › Electronic components

The easily changeable and fully calibrated discharge networks, quickly adapt ESD3000 to the requirements of any new application.  
Light and easy to use.

# EASILY EXPANDABLE

ESD3000 is designed with the user in mind. The modular design allows configuration according to customer wishes, addition of more networks when adding applications and easy extension from 16kV to 30kV using the same generator. Automatic network recognition means ESD3000 is always ready.

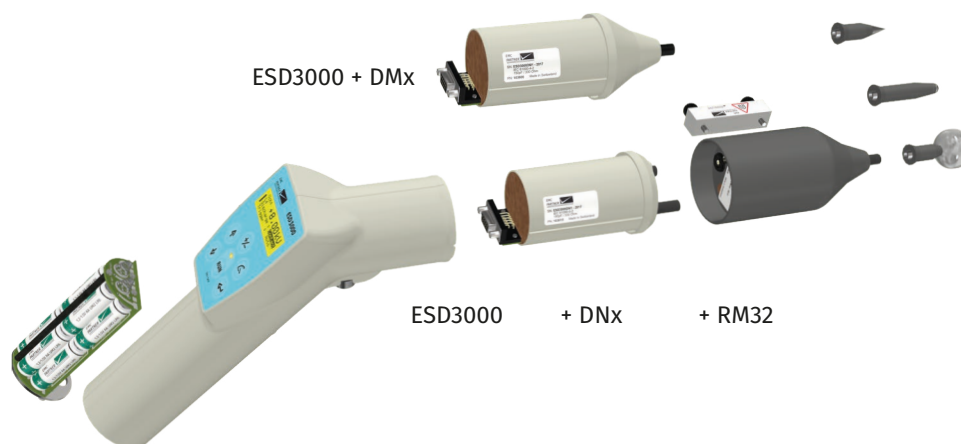

## Discharge Modules (DMx)

up to 16kV Air / 10kV Contact Discharges

- ESD3000 required

### Available Extensions

- DM1 (150pF, 330 Ohm)
- DM4 (100pF / 1500 Ohm)
- DM6 (100pF / 1500 Ohm)

## Discharge Networks (DNx)

up to 30kV Air- and Contact Discharges

- ESD3000 & RM32 required

### Available Extensions

- DN1 (150pF / 330 Ohm)
- DN2 (330 pF, 2000 Ohm)
- DN3 (150 pF, 2000 Ohm)
- DN4 (500 pF, 5000 Ohm)
- DN5 (500 pF, 500 Ohm)
- DN6 (330 pF, 330 Ohm)

## Included

Rechargeable Long-life batteries  
Up to 3 test tips (Sharp, Round, Corona)  
Charger & Firmware update cable  
Handy, robust carrying case



# AVAILABLE MODULES

## Commercial & Industrial

### IEC 61000-4-2

ESD3000DM1 (150pF, 330 Ohm)



## Component Test

### IEC 60749-26 / JEDEC JS-001 / MIL-STD-750D

ESD3000DM6 (100pF / 1500 Ohm)



## Automotive

### ISO 10605 / SAEJSSI-IS / FORD AB/AC / GMW 3097

ESD3000DN1(150pF / 330 Ohm)

ESD3000DN2 (330pF / 2000 Ohm)

ESD3000DN3 (150pF / 2000 Ohm)

ESD3000DN6 (330pF / 330 Ohm)



## Military

### MIL-STD-883 / GR78-CORE

ESD3000DM4 (100pF / 1500 Ohm)

### ISO 14304 / MIL-STD-331 / MIL-STD-1512

ESD3000DN4 (500pF / 5000 Ohm)

### MIL-STD-331 / MIL-DTL-23659D

ESD3000DN5 (500pF / 500 Ohm)

### MIL-STD-1576

ESD3000DN32-MIL3 (500pF / 0 Ohm)





## UNIQUE FEATURES

The original 30kV battery powered generator with a unique system of changeable modules. Flexibility and power combined.

### AA battery powered



Long life standard battery. Up to 8 hours on full battery charge. Readily available in any store.

### Electronic polarity change



Single key press switches polarity before and during the test.

### Extend testing capability



Add calibrated modules to maintain the system value. Unique modules and accessories for special applications.

### Compact solution



Ergonomic hand held tester without additional base unit. Program directly on generator.

# Technical Specifications

## ESD3000 MODULES

| ESD3000            | Mainframe | DM1 (16 kV) | DM4 | DM6 | RM32 | DN1 (30 kV) | DN2 | DN3 | DN4 | DN5 | DN6 | MIL3 |
|--------------------|-----------|-------------|-----|-----|------|-------------|-----|-----|-----|-----|-----|------|
| IEC 61000-4-2      | ✓         | ✓           |     |     |      | alt*        |     |     |     |     |     |      |
| MIL-STD-883        | ✓         |             | ✓   |     |      |             |     |     |     |     |     |      |
| GR78-CORE          | ✓         |             | ✓   |     |      |             |     |     |     |     |     |      |
| IEC 60749-26       | ✓         |             |     | ✓   |      |             |     |     |     |     |     |      |
| JS-001             | ✓         |             |     | ✓   |      |             |     |     |     |     |     |      |
| MIL-STD-750        | ✓         |             | ✓   |     |      |             |     |     |     |     |     |      |
| ISO 10605          | ✓         |             |     |     | ✓    | ✓           | ✓   | ✓   |     |     | ✓   |      |
| DO-160 S25         | ✓         | ✓           |     |     | ✓    | ✓           |     |     |     |     |     |      |
| MIL-STD-461G CS118 | ✓         | ✓           |     |     | ✓    | ✓           |     |     |     |     |     |      |
| GMW3097            | ✓         |             |     |     | ✓    |             | ✓   | ✓   |     |     | ✓   |      |
| MIL-STD-331        | ✓         |             |     |     | ✓    |             |     |     | ✓   | ✓   |     |      |
| MIL-STD-1576       | ✓         |             |     |     | ✓    |             |     |     |     |     |     | ✓    |

\* DN1 as alternative to DM1. Standard requires only 15 kV.

## ACCESSORIES FOR DIFFERENT MODULES

| ESD3000                  | Mainframe | DM1        | DM4 | DM6 | RM32 | DN1        | DN2 | DN3 | DN4 | DN5 | DN6 | MIL3 |
|--------------------------|-----------|------------|-----|-----|------|------------|-----|-----|-----|-----|-----|------|
| EARTH CABLE              | ✓         | IEC, CS118 |     |     |      | IEC, CS118 |     |     |     |     |     |      |
| ESD-VCP50                | ✓         | IEC        |     |     |      | IEC        |     |     |     |     |     |      |
| ESD-TARGET2 DN           | ✓         | IEC        |     |     |      | ISO        | ISO | ISO |     |     | ISO |      |
| TARGET2-ADAPTER N-MALE   | ✓         | IEC        |     |     |      | ISO        | ISO | ISO |     |     | ISO |      |
| TARGET2-ADAPTER N-FEMALE | ✓         | IEC        |     |     |      | ISO        | ISO | ISO |     |     | ISO |      |
| ESD-VERI-V               | ✓         | ✓          | 0   |     | 0    | ✓          | 0   | 0   | ✓   | ✓   | 0   | ✓    |
| ESD-STAND ED2            | ✓         | 0          | 0   | 0   | 0    | 0          | 0   | 0   | 0   | 0   | 0   | 0    |
| ESD-HCP-AUTO             | ✓         |            |     |     |      | ISO        |     |     |     |     | ISO |      |
| DM-EXT                   | ✓         |            |     |     |      |            |     |     | MIL | MIL |     |      |
| SAFETY-S                 | ✓         |            |     |     |      |            |     |     | MIL | MIL |     |      |
| TC-ST ED                 | ✓         |            |     |     |      |            |     |     | MIL | MIL |     |      |
| WARNING LAMP             | ✓         |            |     |     |      |            |     |     | MIL | MIL |     |      |
| EMERGENCY STOP           | ✓         |            |     |     |      |            |     |     | MIL | MIL |     |      |
| ESD3000 CNH12            | ✓         |            |     |     |      | 0          | 0   | 0   | 0   | 0   | 0   |      |
| OPTOLINK                 | ✓         | 0          | 0   | 0   | 0    | 0          | 0   | 0   | 0   | 0   | 0   | 0    |
| TEMA                     | ✓         | 0          | 0   | 0   | 0    | 0          | 0   | 0   | 0   | 0   | 0   | 0    |

0 = Optional Accessories, see product details

| ESD3000        | EARTH CABLE | ESD-VCP50 | ESD-TARGET2 DN | TARGET2-ADAPTER N-MALE | TARGET2-ADAPTER N-FEMALE | ESD-VERI-V | ESD-STAND ED2 | ESD-HCP-AUTO | DM-EXT | ESD-SAFETY-S | TC-ST ED | WARNING LAMP | EMERGENCY STOP | ESD3000 CNH12 | ESD-OPTOLINK | TEMA SOFTW. |
|----------------|-------------|-----------|----------------|------------------------|--------------------------|------------|---------------|--------------|--------|--------------|----------|--------------|----------------|---------------|--------------|-------------|
| IEC61000-4-2   | ✓           | ✓         | opt            | opt                    | opt                      | opt        | opt           |              |        |              |          |              |                |               | opt          | opt         |
| MIL-STD-883    |             |           |                |                        |                          |            |               |              |        |              |          |              |                |               | opt          | opt         |
| GR78-CORE      |             |           |                |                        |                          |            |               |              |        |              |          |              |                |               | opt          | opt         |
| JS-001         |             |           |                |                        |                          |            |               |              |        |              |          |              |                |               |              |             |
| MIL-STD-750    |             |           |                |                        |                          |            |               |              |        |              |          |              |                |               | opt          | opt         |
| ISO10605       | ✓           |           | opt            | opt                    | opt                      | opt        | opt           | opt          |        |              |          |              |                |               | opt          | opt         |
| DO-160 S25     |             |           |                |                        |                          | ✓          |               |              |        |              |          |              |                |               | opt          | opt         |
| MIL-461G CS118 | ✓           |           | ✓              | opt                    | opt                      | ✓          |               |              |        |              |          |              |                |               | opt          | opt         |
| GMW3097        |             |           |                |                        |                          |            |               |              |        |              |          |              |                |               | opt          | opt         |
| MIL-STD-331    |             |           |                |                        |                          |            |               |              | ✓      | ✓            | ✓        | ✓            | ✓              |               | opt          | opt         |
| MIL-STD-1576   |             |           |                |                        |                          |            |               |              |        |              |          |              |                |               | opt          | opt         |

# 1. ESD3000 MAINFRAME AND MODULES

## 1.1. TECHNICAL SPECIFICATIONS

### ESD3000 Mainframe

|                                |                                                                                                                                   |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>To be used with modules</b> | all modules from this document are compatible                                                                                     |
| <b>Construction</b>            | fully portable, no additional basic unit                                                                                          |
| <b>Control</b>                 | LCD and 6 menu buttons, 1 trigger button                                                                                          |
| <b>Maximum voltage</b>         | 16 kV or 30 kV, depending on modules chosen                                                                                       |
| <b>Voltage steps</b>           | 100 V - test                                                                                                                      |
| <b>Discharge polarity</b>      | positive, negative, alternating                                                                                                   |
| <b>Discharge modes</b>         | contact discharge (CD) and air discharge (AD)                                                                                     |
| <b>Discharge frequency CD</b>  | max. 20 Hz, (pulse every 0.05, 0.1, 0.2 ... 60 s)                                                                                 |
| <b>Discharge frequency AD</b>  | ≥ 30 Hz or more, for ex. with DM1, DN1, other                                                                                     |
| <b>Counter</b>                 | pre-selectable, 1 to 29999                                                                                                        |
| <b>Discharge detection</b>     | selectable, count pulses or count discharges                                                                                      |
| <b>Holding time</b>            | ≥ 5 s                                                                                                                             |
| <b>Trigger</b>                 | manual, automatic, remote                                                                                                         |
| <b>Ramps</b>                   | voltage, polarity                                                                                                                 |
| <b>Reporting with TEMA</b>     | automatic report sequence, amplitude, polarity                                                                                    |
| <b>Dimensions</b>              | for ex. with DM1 and tip 340 x 130 x 70 mm                                                                                        |
| <b>Weight mainframe</b>        | 730 g, w/o battery pack and module                                                                                                |
| <b>Weight equipped</b>         | 1050 g, with battery pack, DM1 and AD tip                                                                                         |
| <b>Power supply</b>            | 10 x AA rechargeable batteries or mains                                                                                           |
| <b>Included</b>                | 10 batteries, mains adapter, ground cable 2 m, 3 test tips (AD, AD2, CD), carrying case, RS232 cable, E3Loader for remote control |
| <b>Requires</b>                | at least a DM module, or a DN module + RM32                                                                                       |



### ESD3000DM1

|                                                     |                                             |
|-----------------------------------------------------|---------------------------------------------|
| <b>Standards</b>                                    | IEC 61000-4-2 (latest)                      |
| <b>Other standards</b>                              | MIL-STD-461G CS118, DO-160 Section 25       |
| <b>Storage capacitor</b>                            | 150 pF according to IEC61000-4-2            |
| <b>Discharge resistor</b>                           | 330 $\Omega$ according to IEC61000-4-2      |
| <b>Circuit inductance</b>                           | < 5 $\mu$ H                                 |
| <b>Voltage range AD</b>                             | 0.2 – 16 kV $\pm$ 5 %                       |
| <b>Voltage range CD</b>                             | 0.2 – 10 kV $\pm$ 5 %                       |
| <b>Current rise time into 2 <math>\Omega</math></b> | 0.8 $\pm$ 25 %                              |
| <b>First I peak into 2 <math>\Omega</math> CD</b>   | 7.5 A @ 2 kV – 37.5 A @ 10 kV ( $\pm$ 15 %) |
| <b>Current at 30 ns</b>                             | 4 A @ 2 kV – 20 A @ 10 kV ( $\pm$ 30 %)     |
| <b>Current at 60 ns</b>                             | 2 A @ 2 kV – 10 A @ 10 kV ( $\pm$ 30 %)     |
| <b>Optional</b>                                     | <a href="#">ESD-TARGET2</a>                 |



### ESD3000DM4

|                                                     |                                     |
|-----------------------------------------------------|-------------------------------------|
| <b>Standards</b>                                    | MIL-STD-883, GR78-CORE, MIL-STD-750 |
| <b>Storage capacitor</b>                            | 100 pF $\pm$ 10 %                   |
| <b>Discharge resistor</b>                           | 1500 $\Omega$ $\pm$ 10 %            |
| <b>Voltage range AD</b>                             | 0.2 – 16 kV $\pm$ 5 %               |
| <b>Voltage range CD</b>                             | 0.2 – 10 kV $\pm$ 5 %               |
| <b>Current rise time into 2 <math>\Omega</math></b> | < 10 ns @ 0.2 – 8 kV                |
| <b>I peak into 2 <math>\Omega</math> (CD)</b>       | 2.66 A @ 4 kV, 3.33 A @ 5 kV        |
| <b>RC time constant</b>                             | 150 $\pm$ 20 ns                     |



### ESD3000DM6

|                                                     |                                         |
|-----------------------------------------------------|-----------------------------------------|
| <b>Standards</b>                                    | IEC 61340-3-1, JS-001                   |
| <b>Storage capacitor</b>                            | 100 pF according to IEC61000-4-2        |
| <b>Discharge resistor</b>                           | 1500 $\Omega$ according to IEC61000-4-2 |
| <b>Voltage range CD</b>                             | 0.25 – 8 kV $\pm$ 10 %                  |
| <b>Current rise time into 2 <math>\Omega</math></b> | 2 – 10 ns @ 0.25 – 8 kV                 |
| <b>RC time constant</b>                             | 150 $\pm$ 20 ns                         |



## 30 kV

These extensions need the module ESD3000RM32



### ESD3000DN1

|                                                     |                                                               |
|-----------------------------------------------------|---------------------------------------------------------------|
| <b>Standards</b>                                    | IEC 61000-4-2, ISO 10605                                      |
| <b>Other standards</b>                              | MIL-STD-461G CS118, DO-160 Section 25                         |
| <b>Storage capacitor</b>                            | 150 pF according to IEC61000-4-2                              |
| <b>Discharge resistor</b>                           | 330 $\Omega$ according to IEC61000-4-2                        |
| <b>Circuit inductance</b>                           | < 5 $\mu$ H                                                   |
| <b>Voltage range AD</b>                             | 1 – 30 kV                                                     |
| <b>Voltage range CD</b>                             | 1 – 30 kV                                                     |
| <b>Current rise time into 2 <math>\Omega</math></b> | 0.8 $\pm$ 25 %                                                |
| <b>First I peak into 2 <math>\Omega</math> CD</b>   | 7.5 A @ 2 kV – 112.5 A @ 30 kV                                |
| <b>Current at 30 ns</b>                             | 4 A @ 2 kV – 60 A @ 30 kV                                     |
| <b>Current at 60 ns</b>                             | 2 A @ 2 kV – 30 A @ 30 kV                                     |
| <b>Requires</b>                                     | <a href="#">ESD3000RM32</a>                                   |
| <b>Included in ESD3000RM32</b>                      | detachable module for faster tr (<700ps)                      |
| <b>Optional</b>                                     | <a href="#">ESD-TARGET2 DN</a> , <a href="#">ESD-HCP-AUTO</a> |



### ESD3000DN2

|                                                     |                                               |
|-----------------------------------------------------|-----------------------------------------------|
| <b>Standards</b>                                    | ISO 10605, GMW3097                            |
| <b>Storage capacitor</b>                            | 330 pF according to IEC61000-4-2              |
| <b>Discharge resistor</b>                           | 2000 $\Omega$ according to IEC61000-4-2       |
| <b>Voltage range AD</b>                             | 2 – 30 kV $\pm$ 5 %                           |
| <b>Voltage range CD</b>                             | 2 – 30 kV $\pm$ 5 %                           |
| <b>Current rise time into 2 <math>\Omega</math></b> | 0.7 – 1 ns                                    |
| <b>First I peak into 2 <math>\Omega</math> CD</b>   | 7.5 A @ 2 kV – 112.5 A @ 30 kV (- 0 / + 30 %) |
| <b>RC time constant</b>                             | 600 $\pm$ 130 ns                              |
| <b>Requires</b>                                     | <a href="#">ESD3000RM32</a>                   |
| <b>Optional</b>                                     | <a href="#">ESD-TARGET2 DN</a>                |



### ESD3000DN3

|                                                     |                                               |
|-----------------------------------------------------|-----------------------------------------------|
| <b>Standards</b>                                    | ISO 10605, GMW3097                            |
| <b>Storage capacitor</b>                            | 150 pF according to IEC61000-4-2              |
| <b>Discharge resistor</b>                           | 2000 $\Omega$ according to IEC61000-4-2       |
| <b>Voltage range AD</b>                             | 2 – 30 kV $\pm$ 5 %                           |
| <b>Voltage range CD</b>                             | 2 – 30 kV $\pm$ 5 %                           |
| <b>Current rise time into 2 <math>\Omega</math></b> | 0.7 – 1 ns                                    |
| <b>First I peak into 2 <math>\Omega</math> CD</b>   | 7.5 A @ 2 kV – 112.5 A @ 30 kV (- 0 / + 30 %) |
| <b>RC time constant</b>                             | 300 $\pm$ 60 ns                               |
| <b>Requires</b>                                     | <a href="#">ESD3000RM32</a>                   |
| <b>Optional</b>                                     | <a href="#">ESD-TARGET2 DN</a>                |



### ESD3000DN4

|                                                  |                                                                                                                                                         |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>                                 | ISO14304<br>MIL-STD-1512, MIL-STD-331                                                                                                                   |
| <b>Storage capacitor</b>                         | 500 pF $\pm$ 10 %                                                                                                                                       |
| <b>Discharge resistor</b>                        | 5000 $\Omega$ $\pm$ 10 %                                                                                                                                |
| <b>Voltage range CD</b>                          | 2 – 30 kV $\pm$ 5 %                                                                                                                                     |
| <b>I rise time into 2 <math>\Omega</math> CD</b> | 0.7 – 1 ns                                                                                                                                              |
| <b>Requires</b>                                  | <a href="#">ESD3000RM32</a>                                                                                                                             |
| <b>Optional</b>                                  | <a href="#">ESD3000 SAFETY-S</a> , <a href="#">DM-EXT</a> , <a href="#">TC-ST ED</a> ,<br><a href="#">WARNING-LAMP</a> , <a href="#">EMERGENCY-STOP</a> |



### ESD3000DN5

|                                                  |                                                                                                                                                         |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>                                 | MIL-STD-1512, MIL-STD-331                                                                                                                               |
| <b>Storage capacitor</b>                         | 500 pF $\pm$ 10 %                                                                                                                                       |
| <b>Discharge resistor</b>                        | 500 $\Omega$ $\pm$ 10 %                                                                                                                                 |
| <b>Voltage range CD</b>                          | 2 – 30 kV $\pm$ 5 %                                                                                                                                     |
| <b>I rise time into 2 <math>\Omega</math> CD</b> | 0.7 – 1 ns                                                                                                                                              |
| <b>Requires</b>                                  | <a href="#">ESD3000RM32</a>                                                                                                                             |
| <b>Optional</b>                                  | <a href="#">ESD3000 SAFETY-S</a> , <a href="#">DM-EXT</a> , <a href="#">TC-ST ED</a> ,<br><a href="#">WARNING-LAMP</a> , <a href="#">EMERGENCY-STOP</a> |



### ESD3000DN6

|                                                     |                                                               |
|-----------------------------------------------------|---------------------------------------------------------------|
| <b>Standards</b>                                    | ISO 10605, GMW3097                                            |
| <b>Storage capacitor</b>                            | 330 pF according to IEC61000-4-2                              |
| <b>Discharge resistor</b>                           | 330 $\Omega$ according to IEC61000-4-2                        |
| <b>Voltage range AD</b>                             | 2 – 30 kV $\pm$ 5 %                                           |
| <b>Voltage range CD</b>                             | 2 – 30 kV $\pm$ 5 %                                           |
| <b>Current rise time into 2 <math>\Omega</math></b> | 0.7 – 1 ns                                                    |
| <b>RC time constant</b>                             | 300 $\pm$ 130                                                 |
| <b>Requires</b>                                     | <a href="#">ESD3000RM32</a>                                   |
| <b>Optional</b>                                     | <a href="#">ESD-TARGET2 DN</a> , <a href="#">ESD-HCP-AUTO</a> |



### ESD3000DN32-MIL3

|                           |                             |
|---------------------------|-----------------------------|
| <b>Standard</b>           | MIL-STD-1576                |
| <b>Storage capacitor</b>  | 500 pF                      |
| <b>Discharge resistor</b> | 0 $\Omega$                  |
| <b>Voltage range CD</b>   | 2 – 30 kV $\pm$ 5 %         |
| <b>Requires</b>           | <a href="#">ESD3000RM32</a> |



## 1.2. POWER, CLIMATIC CONDITIONS, SHIPPING WEIGHT, DIMENSIONS

### ESD3000 mainframe

|                                 |                                          |
|---------------------------------|------------------------------------------|
| <b>Mains adapter</b>            | 95 – 250 V (50/60 Hz)                    |
| <b>Power consumption</b>        | ON < 20 VA, standby < 5 VA               |
| <b>Temperature range</b>        | 15 – 35 °C                               |
| <b>Humidity</b>                 | 30 – 60 % non-condensing                 |
| <b>Air pressure</b>             | 86 – 106 kPa                             |
| <b>Shipping weight</b>          | 2.4 kg plus selected modules             |
| <b>Carrying case dimensions</b> | 46 x 41 x 17 cm                          |
| <b>Included in delivery</b>     |                                          |
| <b>User manual</b>              | with conformity declaration              |
| <b>Calibration certificate</b>  | factory calibration for selected modules |

## 2. ACCESSORIES FOR ESD3000

### 2.1. TECHNICAL SPECIFICATIONS

#### EARTH CABLE

|                    |                                          |
|--------------------|------------------------------------------|
| <b>Application</b> | connection of HCP or VCP to ground plane |
| <b>Impedance</b>   | 2 x 470 k $\Omega$ $\pm$ 1 %             |
| <b>Length</b>      | 2 m                                      |
| <b>Connectors</b>  | 2 x banana plugs                         |

#### ESD-VCP50

|                           |                                               |
|---------------------------|-----------------------------------------------|
| <b>Application</b>        | indirect ESD application as per IEC 61000-4-2 |
| <b>Spacer in between</b>  | 10 cm wooden spacer                           |
| <b>Coupling plane</b>     | 50 x 50 cm                                    |
| <b>Application points</b> | one on each side                              |
| <b>Dimensions</b>         | 50 x 50 x 10 cm                               |
| <b>Weight</b>             | 8 kg                                          |
| <b>Included</b>           | 2 m earth cable (with 2 x 470 k $\Omega$ )    |



#### ESD-TARGET2 DN


|                          |                                                        |
|--------------------------|--------------------------------------------------------|
| <b>Standard</b>          | IEC 61000-4-2 latest                                   |
| <b>Application</b>       | current target for calibration of ESD generator        |
| <b>Surface Finish</b>    | gold plated, lifetime protection against corrosion     |
| <b>Input impedance</b>   | 2 $\Omega$                                             |
| <b>Input voltage</b>     | max. 30 kV CD                                          |
| <b>Frequency range</b>   | $\pm$ 0.5 dB up to 1 GHz, $\pm$ 1.2 dB up to 4 GHz     |
| <b>Current range</b>     | 0 – 120 A standard, could be extended                  |
| <b>Transfer function</b> | 0.2 V / 1 A with 20 dB, 0.02 V / 1 A with 40 dB        |
| <b>Diameter</b>          | 70 mm                                                  |
| <b>Thickness</b>         | 40 mm                                                  |
| <b>Weight</b>            | 398 g including attenuator                             |
| <b>Fixing</b>            | 8 x M3 screws, included in delivery                    |
| <b>Included</b>          | 40 dB att., 50 $\Omega$ coax. cable (1 m) with SMA out |



### TARGET2-ADAPTER N-MALE

|                                                 |                                                   |
|-------------------------------------------------|---------------------------------------------------|
| <b>Standards</b>                                | IEC 61000-4-2 latest                              |
| <b>Application</b>                              | verification of ESD-TARGET2 DN                    |
| <b>Surface finish</b>                           | gold plated,lifetime protection against corrosion |
| <b>Output Impedance</b>                         | $50 \pm 1 \Omega$ (within 4 GHz bandwidth)        |
| <b>Return loss (<math>\leq 1</math> GHz)</b>    | $< 30 \text{ dB}^{1)}$                            |
| <b>Return loss (<math>\leq 4</math> GHz)</b>    | $< 20 \text{ dB}^{1)}$                            |
| <b>Insertion loss (<math>\leq 4</math> GHz)</b> | $< 0.3 \text{ dB}$ (total)                        |
| <b>Geometry</b>                                 | conical as per standard                           |
| <b>Coaxial Connector</b>                        | N-Male                                            |
| <b>Diameter</b>                                 | 70 mm                                             |
| <b>Thickness</b>                                | 30 mm                                             |
| <b>Weight</b>                                   | 250g                                              |
| <b>Fixing</b>                                   | 8x M3 screws, included in delivery                |
| <b>requires</b>                                 | ESD-TARGET2 DN                                    |

1) face-to-face with ESD-TARGET2 DN



### TARGET2-ADAPTER N-FEMALE

|                                                 |                                                   |
|-------------------------------------------------|---------------------------------------------------|
| <b>Standards</b>                                | IEC 61000-4-2 latest                              |
| <b>Application</b>                              | verification of TARGET2-ADAPTER N-MALE            |
| <b>Surface finish</b>                           | gold plated,lifetime protection against corrosion |
| <b>Output Impedance</b>                         | $50 \pm 1 \Omega$ (within 4 GHz bandwidth)        |
| <b>Return loss (<math>\leq 1</math> GHz)</b>    | $< 30 \text{ dB}^{1)}$                            |
| <b>Return loss (<math>\leq 4</math> GHz)</b>    | $< 20 \text{ dB}^{1)}$                            |
| <b>Insertion loss (<math>\leq 4</math> GHz)</b> | $< 0.3 \text{ dB}$ (total)                        |
| <b>Geometry</b>                                 | conical as per standard                           |
| <b>Coaxial Connector</b>                        | N-Female                                          |
| <b>Diameter</b>                                 | 70 mm                                             |
| <b>Thickness</b>                                | 30 mm                                             |
| <b>Weight</b>                                   | 250g                                              |
| <b>Fixing</b>                                   | 8x M3 screws, included in delivery                |
| <b>requires</b>                                 | TARGET2-ADAPTER N-MALE                            |

1) face-to-face with TARGET2-ADAPTER N-MALE



### ESD-VERI-V

|                             |                                                          |
|-----------------------------|----------------------------------------------------------|
| <b>Application</b>          | adapter for ESD DC voltage measurement                   |
| <b>Input impedance</b>      | $20 \text{ G}\Omega \parallel 3 \text{ pF}$              |
| <b>Input voltage range</b>  | 0 – 32 kV                                                |
| <b>Output voltage range</b> | 0 – 1.6 V in $10 \text{ M}\Omega$ or $1 \text{ M}\Omega$ |
| <b>Output connector</b>     | BNC                                                      |
| <b>Dimensions</b>           | 17 cm height, 5.5 cm diameter                            |
| <b>Weight</b>               | 433 g                                                    |
| <b>Included</b>             | earth conductor, BCN adapter, BNC termination            |



### ESD-STAND Ed2

|             |                                                |
|-------------|------------------------------------------------|
| Application | stand for supporting ESD gun, fixed point test |
| Height      | 50 – 180 cm, adjustable                        |
| Position    | 360° adjustable                                |
| Dimensions  | 64 x 17 x 12 cm (packed)                       |
| Weight      | 4 kg                                           |
| Included    | cable holder for calibration                   |

### ESD-HCP-AUTO

|                     |                                         |
|---------------------|-----------------------------------------|
| Application         | coupling plane as per ISO 10605 annex F |
| Length              | 1500 mm                                 |
| Insulation distance | 50 mm                                   |
| Test level          | 8 – 20 kV, as per standard              |
| Dimensions          | 180 x 120 x 5 cm                        |
| Weight              | 2.2 kg                                  |
| Included            | EARTH CABLE                             |



### ESD3000DM-EXT

|                  |                                         |
|------------------|-----------------------------------------|
| Application      | 1 m extension cable for ESD3000 modules |
| Compatibility    | DM and DN modules                       |
| Cable length     | 1 ± 0.05 m                              |
| Weight           | 0.5 kg including accessories            |
| Can be used with | DN modules                              |



### ESD3000 SAFETY-S

|                 |                                             |
|-----------------|---------------------------------------------|
| Standard        | MIL-STD-331, MIL-STD-1512                   |
| Application     | safety switch for testing explosive devices |
| Voltage         | max. 30 kV CD                               |
| Dimensions      | 20 x 16 x 12 cm                             |
| Weight          | 2 kg including accessories                  |
| Included        | mains adapter                               |
| To be used with | ESD3000DM-EXT, TC-MIG24 ED                  |



### TC-ST ED for testing explosive devices

|                        |                                            |
|------------------------|--------------------------------------------|
| Application            | test cabinet                               |
| Voltage insulation     | max. 36 kV                                 |
| EUT dimensions         | max. 20 x 30 x 20 cm                       |
| EUT weight             | max. 5 kg                                  |
| Safety circuit         | door interlock                             |
| Signal lamps           | red and green lamps built-in               |
| External warning lamps | requires WARNING-LAMP, EMERGENCY-STOP      |
| Dimensions             | 47 x 43.5 x 25.4 cm                        |
| Weight                 | 8.5 kg                                     |
| Included               | connection cable 25pol to ESD3000 SAFETY-S |



### WARNING-LAMP

|              |                        |
|--------------|------------------------|
| Cable length | 5 m                    |
| Dimensions   | diameter 7x cm x 25 cm |
| Weight       | 0.5 kg                 |



### EMERGENCY-STOP

|              |                    |
|--------------|--------------------|
| Cable length | 5 m                |
| Dimensions   | 8 cm x 8 cm x 10cm |
| Weight       | 0.3 kg             |



### ESD3000 CNH12

|                          |                                                                      |
|--------------------------|----------------------------------------------------------------------|
| Application              | Magnetic field loop for ESD3000 test system                          |
| Loop diameter            | 12 cm                                                                |
| Loop current allowed     | > 100 A                                                              |
| Discharge mode selection | contact discharge (CD)                                               |
| Current at 15 kV setting | 50 A, with RM32 and DN1                                              |
| Current at 30 kV setting | 108 A, with RM32 and DN1                                             |
| Dimensions               | 33 x 13 x 1 cm                                                       |
| Weight                   | 0.2 kg including accessories                                         |
| Requires                 | <a href="#">ESD3000RM32</a> , <a href="#">ESD3000DN1</a> or other DN |



### ESD3000-OPTOLINK

|             |                                               |
|-------------|-----------------------------------------------|
| Application | (insulating) optical cable ESD3000 - computer |
| Length      | 10 m                                          |
| Interface   | RS232, requires USB adapter                   |
| Baud rate   | 9600 bps                                      |
| Weight      | 0.2 kg                                        |
| Included    | tranceiver with mains adapter                 |



### TEMA

|                           |                                      |
|---------------------------|--------------------------------------|
| Application               | control software for ESD3000 system  |
| License                   | 1 license for 1 generator            |
| Capabilities with ESD3000 | Sequences, reporting, remote control |
| Compatibility             | Windows XP, 7, 8, 10                 |
| Requires                  | <a href="#">ESD3000-OPTOLINK</a>     |

EMC PARTNER

# PRODUCT APPLICATION RANGE

## CONSUMER & INDUSTRIAL ELECTRONICS

Transient Test Systems for conducted EMC tests on electronic equipment. ESD, EFT, surge, ring wave, DOW, dips, magnetic field, common and differential mode. Compliant to IEC, EN and ANSI standards.



## AEROSPACE ELECTRONICS

Impulse generators and couplers for avionic applications. Single stroke, multiple stroke and multiple burst according to RTCA / DO-160, EUROCAE / ED-14 and aircraft manufacturer standards.



## Component Testing

Voltage and current Impulse generators for design and production testing of varistors, gas discharge tubes, surge protective devices, X / Y capacitors and specialist impulse generators for semiconductor tests.



## DEFENCE ELECTRONICS

Complete test solutions for MIL-STD-461 requirements CS06, CS106, CS115, CS116, CS117 and CS118.



## TELECOM & data line testing

Voltage and current impulse generators, CDNs, power contact, power induction equipment for exchange and customer equipment according to ITU, IEC, EN and ETSI requirements.



## ENERGY & UTILITY EQUIPMENT

High current CDNs combined with transient test equipment fulfil requirements to test renewable and classical energy distribution network and monitoring equipment.




## CUSTOMER ServiceS

Customer support throughout an equipment's lifetime is central to the EMC PARTNER AG philosophy. Directly from our ISO accredited facility in Switzerland or through our network of services centres, we provide support wherever you



For further information please do not hesitate to contact your local EMC PARTNER AG representative.  
Visit our website for more information and contact details.

# [www.emc-partner.com](http://www.emc-partner.com)

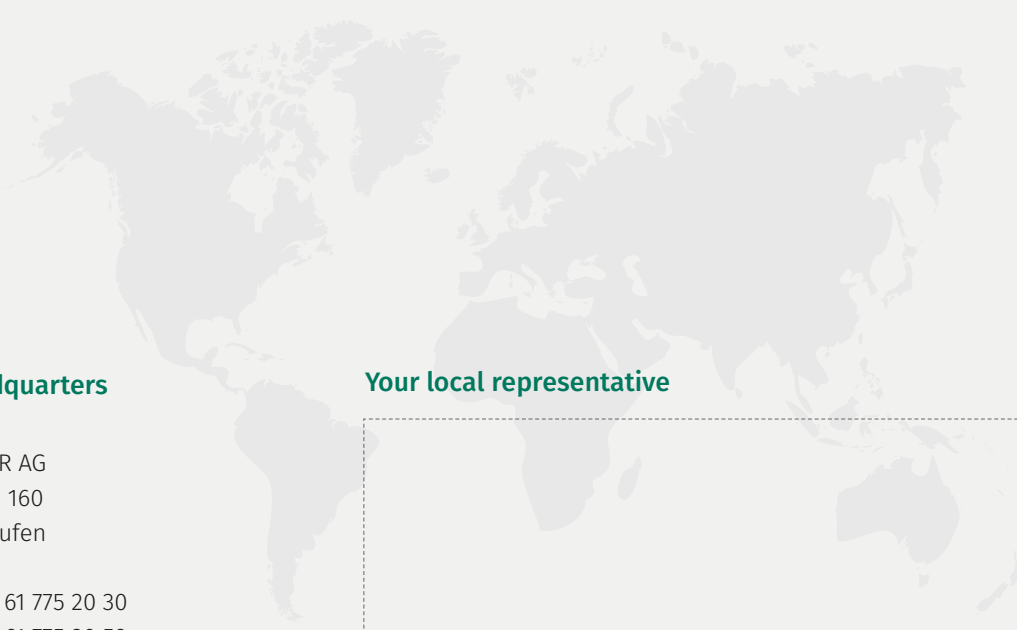

## Swiss Headquarters

EMC PARTNER AG  
Baselstrasse 160  
CH - 4242 Laufen

Phone +41 61 775 20 30  
Fax +41 61 775 20 59  
Email [service@emc-partner.ch](mailto:service@emc-partner.ch)  
Web [www.emc-partner.com](http://www.emc-partner.com)

## Your local representative

Information and specifications in this document are an indication of capability only. Version 6.4. Subject to change without notice. EMC PARTNER AG publishes only the English version of this document. Translation into other languages is not guaranteed to be a true representation of content or specification.

© by EMC PARTNER AG. No changes or reproduction without permission of EMC PARTNER AG allowed.